

## Peak 3A, Low Dropout Regulator with Enable

### Features

- Adjustable Output Low to 0.8V
- Input Voltage as Low as 1.4V and VPP Voltage 5V
- 300mV Dropout @ 2A, VO 2.5V
- Over Current and Over Temperature Protection
- Enable Pin
- Low Reverse Leakage (Output to Input )
- Power SOP-8 (FD) and TDFN3X3-10 Packages with Thermal Pad
- ±2% Output Voltage
- VO Power OK Signal
- 2.5V Options by Setting ADJ Pin Below 0.2V and Adjustable Externally Using Resistors
- VO Pull Low Resistance when Disable

### Applications

- Motherboards
- Peripheral Cards
- Network Cards
- Set Top Boxes
- Notebook Computers

### General Description

The G966L is a high performance positive voltage regulator designed for use in applications requiring very low Input voltage and very low dropout voltage at up to 2 amps. It operates with a  $V_{IN}$  as low as 1.4V and VPP voltage 5V with output voltage programmable as low as 0.8V. The G966L features ultra low dropout, ideal for applications where  $V_{OUT}$  is very close to  $V_{IN}$ . Additionally, the G966L has an enable pin to further reduce power dissipation while shutdown. The G966L provides excellent regulation over variations in line, load and temperature. The G966L provides a power OK signal to indicate if the voltage level of VO reaches 92% of its rating value.


The G966L is available in the power SOP-8 (FD) and TDFN3X3-10 package. It is available with 2.5V internally preset outputs that are also adjustable using external resistors.

### Ordering Information

ORDER NUMBER	MARKING	OUTPUT VOLTAGE	TEMP. RANGE	PACKAGE (Green)
G966L-25ADJF11U	966L-25	2.5V	-40°C~+85°C	SOP-8 (FD)
G966L-25ADJRE1U	966LA	2.5V	-40°C~+85°C	TDFN3X3-10

Note: F1: SOP-8 (FD) RE: TDFN3X3-10  
 1: Bonding Code  
 U: Tape & Reel

### Pin Configuration

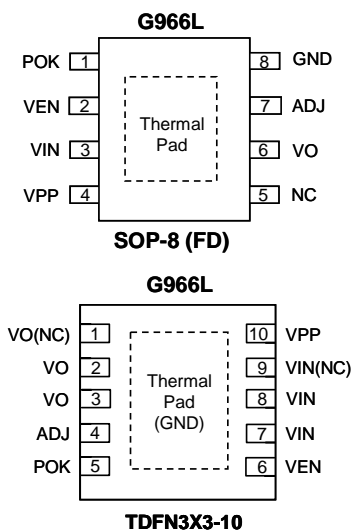

Note: Recommend connecting the Thermal Pad to the Ground for excellent power dissipation.

### Typical Application Circuit

